




Delivery hose "Pionier 500" for toughest operating conditions

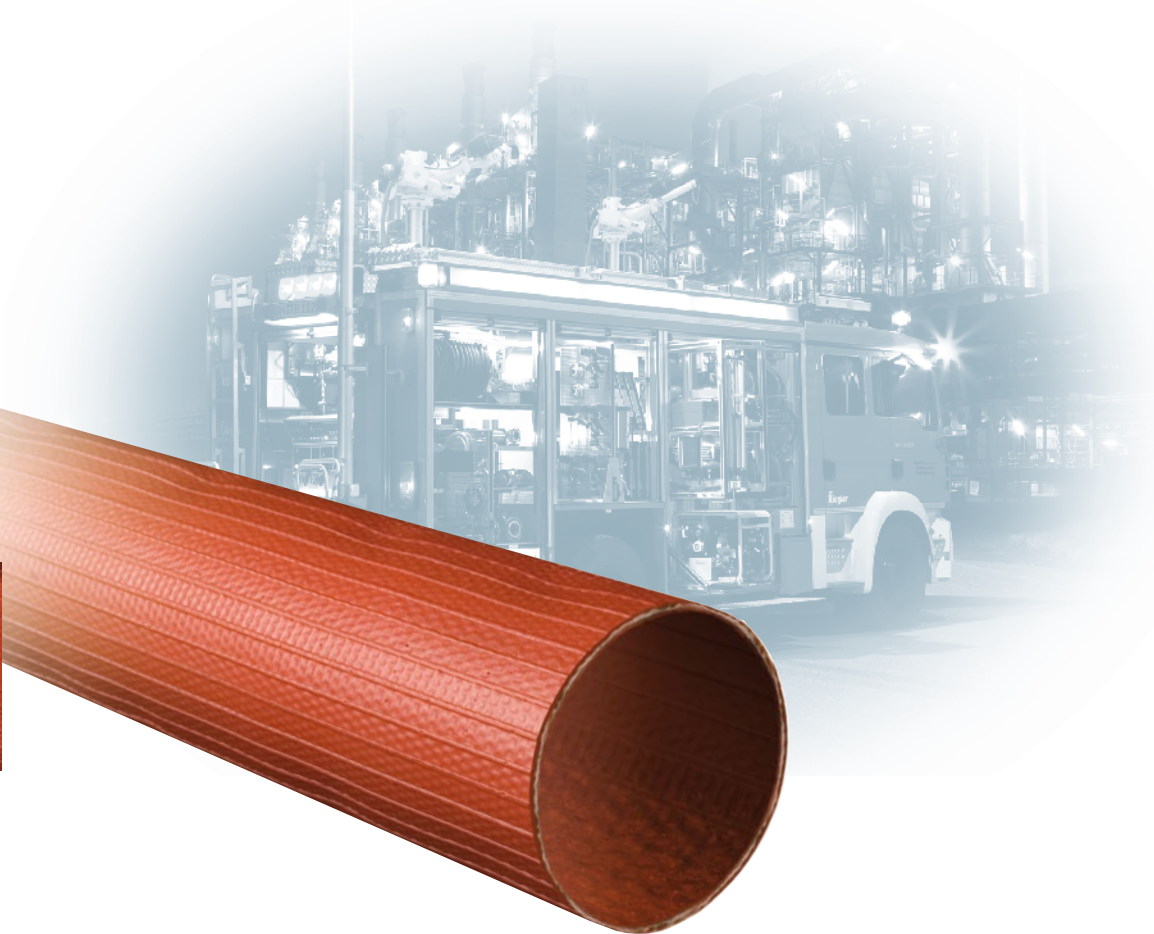

Delivery hose "Pionier 500" sold by metre

030456 Size D 25 mm, 1 m

Fabric of branded polyester, inside and outside gumming of nitrile rubber and polyvinyl chloride, outside gumming with longitudinal ribs, for 16 bar working pressure, 25 bar test pressure and more than 50 bar minimum bursting pressure. Acc. to DIN 14811 Class 3.

030970 Size C 38 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030874 Size C 40 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030971 Size C 45 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

031157 Size C 52 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030975 Size C 55 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030972 Size B 65 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030973 Size B 70 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

031158 Size B 75 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030875 Size A 102 mm, 1 m

As described above, however, for 14 bar working pressure, 25 bar test pressure and more than 42 bar minimum bursting pressure.

Acc. to DIN 14811 Class 3.

031159 Size A 110 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030876 Size F 125 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.

030806 Size F 150 mm, 1 m

Acc. to DIN 14811 Class 3. As described above.